



STANDARD CONCRETE CARRIAGE WALK

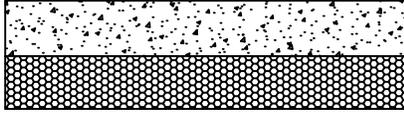

5" MINIMUM CONCRETE THICKNESS

3-6" OF 3/4" GRAVEL TYPICAL

STONE ON CONCRETE CARRIAGE WALK

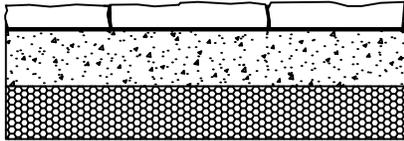


FIELD STONES MORTARED TO CONCRETE

5" MINIMUM CONCRETE THICKNESS

3-6" OF 3/4" GRAVEL TYPICAL

BRICKS IN SAND CARRIAGE WALK

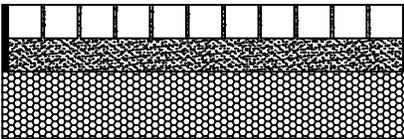


BRICKS IN COMPACTED SAND BEDDING

2-3" MINIMUM OF SAND WITH EDGING

6" MINIMUM OF 3/4" GRAVEL

CARRIAGE WALK TO TOPSOIL AND SEED

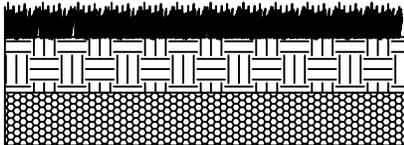


4-5" OF TOPSOIL, SEED AND MULCH

DEPTH OF EXISTING GRAVEL VARIES

NOTES:

1. ALL CARRIAGE WALK IS SUBJECT TO INSPECTION AND REMOVAL BY THE VILLAGE AT ANY TIME.
2. THE VILLAGE STANDARD CARRIAGE WALK IS A 4 FEET WIDE, 5 INCH THICK CONCRETE, WITH 1/2" FELT ABUTTING THE SIDEWALK AND THE CURB.
3. ALL CARRIAGE WALK MUST BE APPROVED BY THE VILLAGE ENGINEER.
4. A RIGHT OF WAY PERMIT, AND PROOF OF LIABILITY INSURANCE IS REQUIRED TO WORK IN THE RIGHT OF WAY.
5. CARRIAGE WALK OTHER THAN THE STANDARD CONCRETE SUCH AS BRICK OR STONE, WILL IN NO CASE BE REPLACED OR MAINTAINED BY THE VILLAGE. THE VILLAGE WILL ORDER REPAIR BY THE ADJACENT OWNER, REPLACE IT WITH CONCRETE OR REMOVE ANY CARRIAGE WALK FOUND IN DISREPAIR.
6. ALL METHODS AND MATERIALS ARE SUBJECT TO APPROVAL.
7. A CLEAR ZONE OF 3' SHOULD BE MAINTAINED FROM FEATURES SUCH AS TREES, HYDRANTS AND DRIVEWAYS.
8. CARRIAGE WALK MUST DRAIN OVER THE CURB AND ITS SLOPE SHOULD MEET A.D.A. STANDARDS.

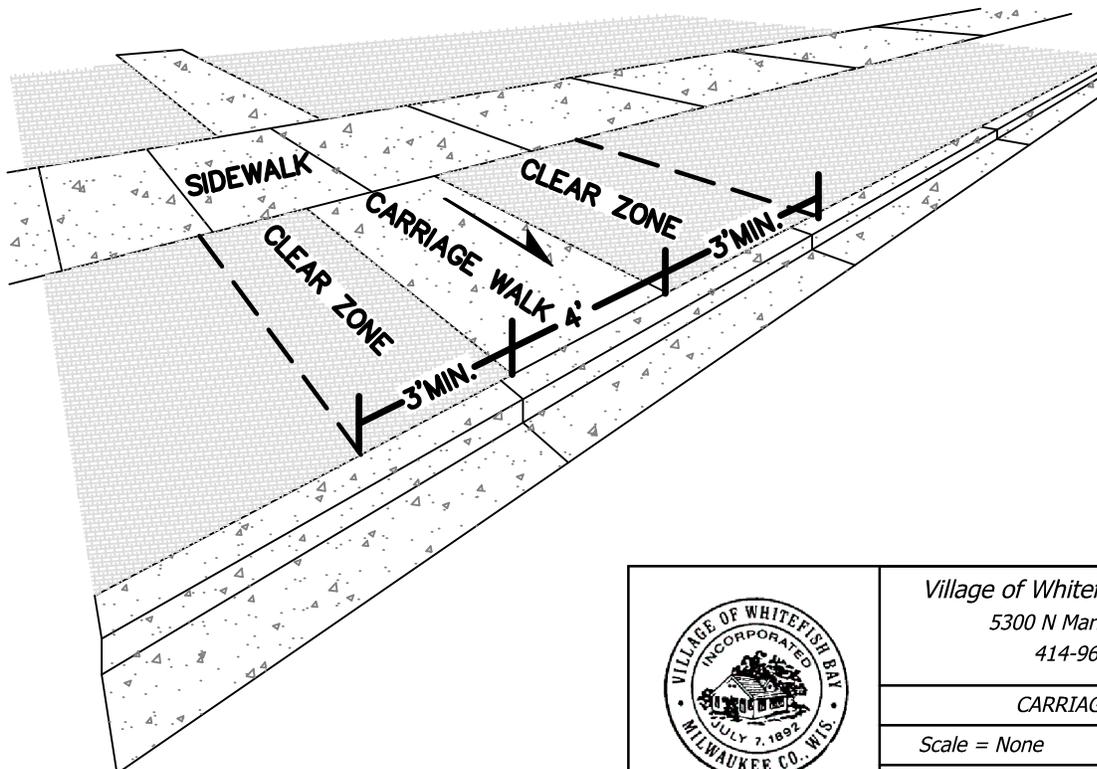

Village of Whitefish Bay Engineering
 5300 N Marlborough Drive
 414-962-6690

CARRIAGE WALK

Scale = None

REV-MAY10

Sheet 1 of 1

DETAIL 13